



N Male to TNC Male Low Loss Cable 100 CM  
Length Using LMR-400 Coax with HeatShrink

**RF Cable Assemblies Technical Data Sheet**

**PE3W00013/HS-100CM**

**Configuration**

- Connector 1: N Male
- Connector 2: TNC Male
- Cable Type: LMR-400

**Features**

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- PE Jacket


**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3W00013/HS-100CM type N male to TNC male 100 cm cable using LMR-400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400 coax. The PE3W00013/HS-100CM type N male to TNC male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

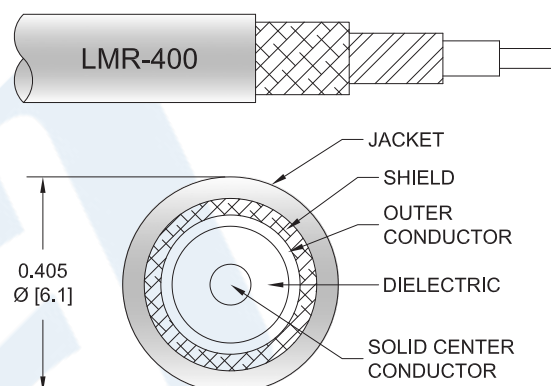

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Low Loss Cable 100 CM Length Using LMR-400 Coax with HeatShrink PE3W00013/HS-100CM](#)



N Male to TNC Male Low Loss Cable 100 CM  
Length Using LMR-400 Coax with HeatShrink

## RF Cable Assemblies Technical Data Sheet

**PE3W00013/HS-100CM**

### Electrical Specifications

| Description                          | Minimum | Typical      | Maximum | Units              |
|--------------------------------------|---------|--------------|---------|--------------------|
| Frequency Range                      | DC      |              | 5.8     | GHz                |
| VSWR                                 |         |              | 1.4:1   |                    |
| Velocity of Propagation              |         | 85           |         | %                  |
| RF Shielding                         | 90      |              |         | dB                 |
| Group Delay                          |         | 1.2 [3.94]   |         | ns/ft [ns/m]       |
| Capacitance                          |         | 23.9 [78.41] |         | pF/ft [pF/m]       |
| Inductance                           |         | 0.06 [0.2]   |         | uH/ft [uH/m]       |
| DC Resistance Inner Conductor<br>Km] |         | 1.39 [4.56]  |         | Ohms/1000ft [Ohms/ |
| DC Resistance Outer Conductor<br>Km] |         | 1.65 [5.41]  |         | Ohms/1000ft [Ohms/ |
| Jacket Spark                         |         |              | 8,000   | Vrms               |

### Specifications by Frequency

| Description           | F1   | F2  | F3   | F4   | F5   | Units |
|-----------------------|------|-----|------|------|------|-------|
| Frequency             | 0.25 | 0.5 | 1    | 2.5  | 5.8  | GHz   |
| Insertion Loss (Max.) | 0.27 | 0.3 | 0.34 | 0.43 | 0.56 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss includes as estimated insertion loss of 0.2dB of connector loss.

### Mechanical Specifications

#### Cable Assembly

|          |                   |
|----------|-------------------|
| Length*  | 39.37 in [100 cm] |
| Diameter | 0.8 in [20.32 mm] |

#### Cable

|                                      |                      |
|--------------------------------------|----------------------|
| Cable Type                           | LMR-400              |
| Impedance                            | 50 Ohms              |
| Inner Conductor Type                 | Solid                |
| Inner Conductor Material and Plating | Copper Clad Aluminum |
| Dielectric Type                      | PE (F)               |
| Number of Shields                    | 2                    |
| Shield Layer 1                       | Aluminum Tape        |
| Shield Layer 2                       | Tinned Copper Braid  |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Low Loss Cable 100 CM Length Using LMR-400 Coax with HeatShrink PE3W00013/HS-100CM](#)



N Male to TNC Male Low Loss Cable 100 CM  
Length Using LMR-400 Coax with HeatShrink

**RF Cable Assemblies Technical Data Sheet**

**PE3W00013/HS-100CM**

|                              |                        |
|------------------------------|------------------------|
| Jacket Material              | PE, Black              |
| Jacket Diameter              | 0.405 in [10.29 mm]    |
| One Time Minimum Bend Radius | 1 in [25.4 mm]         |
| Repeated Minimum Bend Radius | 4 in [101.6 mm]        |
| Bending Moment               | 0.5 lbs-ft [0.68 N-m]  |
| Flat Plate Crush             | 40 lbs/in [0.71 Kg/mm] |
| Tensile Strength             | 160 lbs [72.57 Kg]     |

**Connectors**

| Description                        | Connector 1       | Connector 2      |
|------------------------------------|-------------------|------------------|
| Type                               | N Male            | TNC Male         |
| Impedance                          | 50 Ohms           | 50 Ohms          |
| Mating Cycles                      |                   | 500              |
| Contact Material and Plating       | Brass, Gold       | Brass, Gold      |
| Contact Plating Specification      | 50 µ in. minimum  |                  |
| Dielectric Type                    | PTFE              |                  |
| Body Material and Plating          | Brass, Tri-Metal  | Brass, Tri-Metal |
| Body Plating Specification         | 150 µ in. minimum |                  |
| Coupling Nut Material and Plating  | Brass, Tri-Metal  | Brass, Tri-Metal |
| Coupling Nut Plating Specification | 150 µ in. minimum |                  |
| Hex Size                           | 13/16 inch        |                  |

**Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8$ ", whichever is greater.

**Environmental Specifications**

**Temperature**

Operating Range -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Low Loss Cable 100 CM Length Using LMR-400 Coax with HeatShrink PE3W00013/HS-100CM](#)



N Male to TNC Male Low Loss Cable 100 CM  
Length Using LMR-400 Coax with HeatShrink

**RF Cable Assemblies Technical Data Sheet**

**PE3W00013/HS-100CM**

**How to Order**

Part Number Configuration:

**PE3W00013/HS**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W00013/HS-12 = 12 inches long cable  
PE3W00013/HS-100cm = 100 cm long cable

N Male to TNC Male Low Loss Cable 100 CM Length Using LMR-400 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Low Loss Cable 100 CM Length Using LMR-400 Coax with HeatShrink PE3W00013/HS-100CM](#)

URL: <https://www.pasternack.com/n-male-tnc-male-lmr400-cable-assembly-pe3w00013-hs-100cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W00013/HS-100CM CAD Drawing  
N Male to TNC Male Low Loss Cable 100 CM Length  
Using LMR-400 Coax with HeatShrink

