

TNC Male to N Female Cable 12 Inch Length  
Using LMR-100 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3W02061LF-12

**Configuration**

- Connector 1: TNC Male
- Connector 2: N Female
- Cable Type: LMR-100A

**Features**

- Max Frequency 2 GHz
- Shielding Effectivity > 90 dB
- 66% Phase Velocity
- Double Shielded
- PVC Jacket


**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3W02061LF-12 TNC male to type N female 12 inch cable using LMR-100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to type N cable assembly has a male to female gender configuration with 50 ohm flexible LMR-100A coax. The PE3W02061LF-12 TNC male to type N female cable assembly operates to 2 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

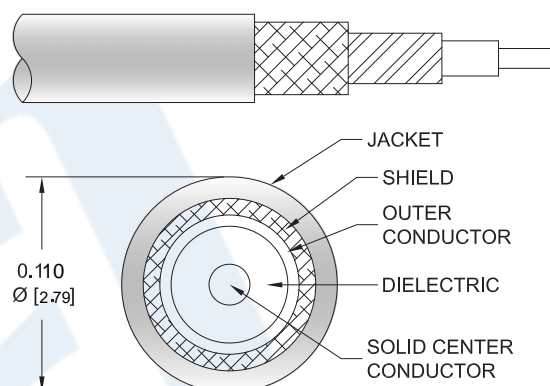

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Female Cable 12 Inch Length Using LMR-100 Coax , LF Solder PE3W-02061LF-12](#)

## TNC Male to N Female Cable 12 Inch Length Using LMR-100 Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE3W02061LF-12

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
VSWR			1.5:1	
Velocity of Propagation		66		%
RF Shielding	90			dB
Group Delay		1.54 [5.05]		ns/ft [ns/m]
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Inductance		0.077 [0.25]		uH/ft [uH/m]
DC Resistance Inner Conductor Km]		81 [265.75]		Ohms/1000ft [Ohms/
DC Resistance Outer Conductor Km]		9.5 [31.17]		Ohms/1000ft [Ohms/
Jacket Spark			2,000	Vrms

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	2	GHz
Insertion Loss (Max.)	0.27	0.312	0.365	0.439	0.551	dB

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector Loss

#### Mechanical Specifications

##### Cable Assembly

Length*	12 in [304.8 mm]
Diameter	0.625 in [15.88 mm]

##### Cable

Cable Type	LMR-100A
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Female Cable 12 Inch Length Using LMR-100 Coax , LF Solder PE3W-02061LF-12](#)

## TNC Male to N Female Cable 12 Inch Length Using LMR-100 Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE3W02061LF-12

Jacket Material	PVC, Black
Jacket Diameter	0.11 in [2.79 mm]
One Time Minimum Bend Radius	0.25 in [6.35 mm]
Repeated Minimum Bend Radius	1 in [25.4 mm]
Bending Moment	0.1 lbs-ft [0.14 N-m]
Flat Plate Crush	10 lbs/in [0.18 Kg/mm]
Tensile Strength	15 lbs [6.8 Kg]

#### Connectors

Description	Connector 1	Connector 2
Type	TNC Male	N Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Gold
Dielectric Type	Teflon	PTFE
Body Material and Plating	Brass, Silver	Brass, Nickel
Coupling Nut Material and Plating	Brass, Silver	

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Female Cable 12 Inch Length Using LMR-100 Coax , LF Solder PE3W-02061LF-12](#)

## TNC Male to N Female Cable 12 Inch Length Using LMR-100 Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet

PE3W02061LF-12

#### How to Order

Part Number Configuration:

**PE3W02061LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W02061LF-12 = 12 inches long cable  
PE3W02061LF-100cm = 100 cm long cable

TNC Male to N Female Cable 12 Inch Length Using LMR-100 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to N Female Cable 12 Inch Length Using LMR-100 Coax , LF Solder PE3W02061LF-12](https://www.pasternack.com/tnc-male-n-female-lmr100-cable-assembly-pe3w02061lf-12-p.aspx)


URL: <https://www.pasternack.com/tnc-male-n-female-lmr100-cable-assembly-pe3w02061lf-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W02061LF-12 CAD Drawing

TNC Male to N Female Cable 12 Inch Length Using LMR-100 Coax , LF Solder

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/02/19	SELLIS

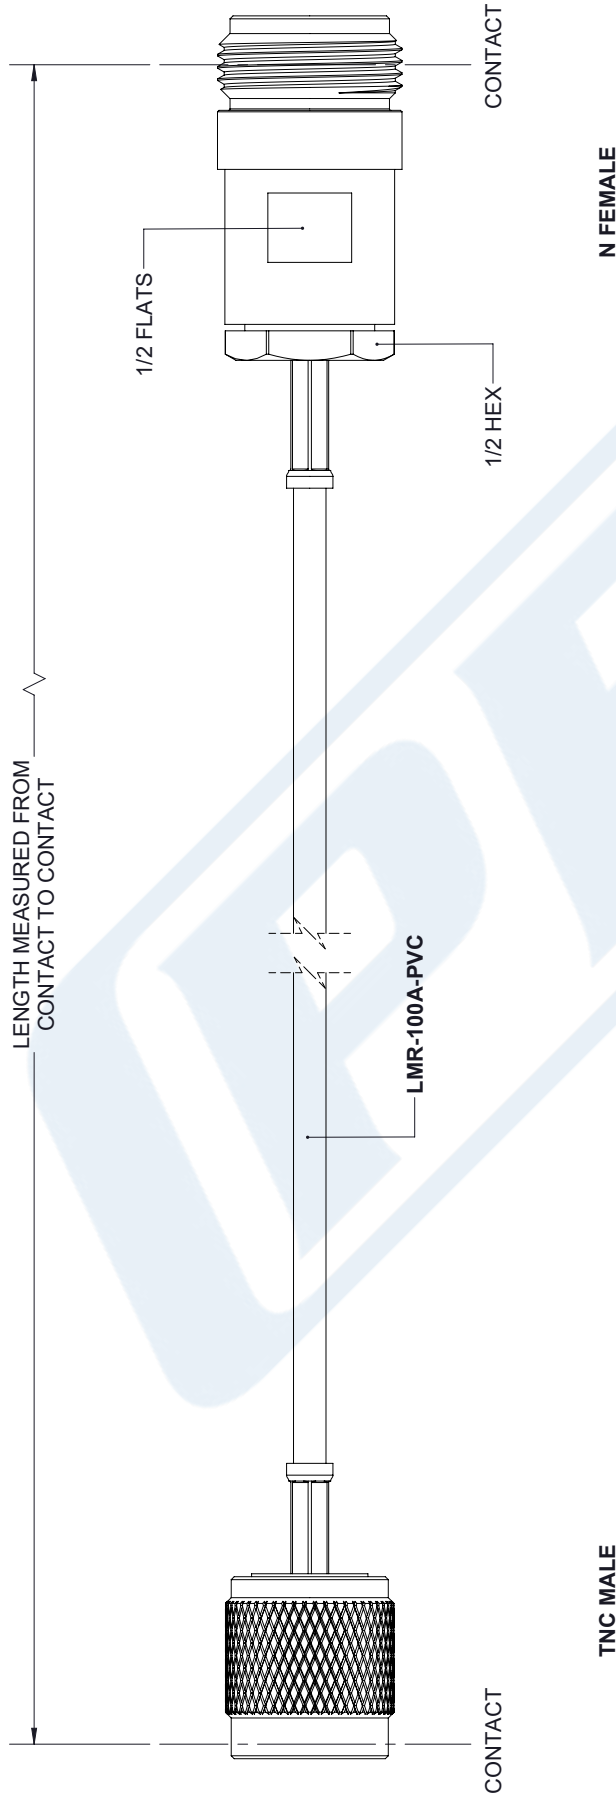

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS						<b>PASTERNAK</b> an INFINITE® brand			THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.		
TOLERANCES:									SHEET 1 OF 1		
X±.2 [5.08]			FRACTIONS			Pasternack Enterprises, Inc.			SCALE N/A		
.XX±.01 [.25]			±.132			P.O.Box 16759, Irvine, CA 92623.					
XXX±.005 [.13]			ANGLES ± 1°			Phone: 1.949.261.1920   1.866.727.8376					
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.						Fax: 1.949.261.7451					
THIRD-ANGLE PROJECTION						www.pasternack.com   e-mail: sales@pasternack.com			REV A		
SIZE A			CAGE 53919			DRAWN BY K.DANG			PART NUMBER PE3W02061LF		

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.