



Reverse Polarity TNC Male to N Female Bulkhead Cable 50 cm Length Using LMR-400 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet


PE3W02753/HS-50CM

Configuration

- Connector 1: TNC Male Reverse Polarity
- Connector 2: N Female Bulkhead
- Cable Type: LMR-400

Features

- Max Frequency 2 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- PE Jacket

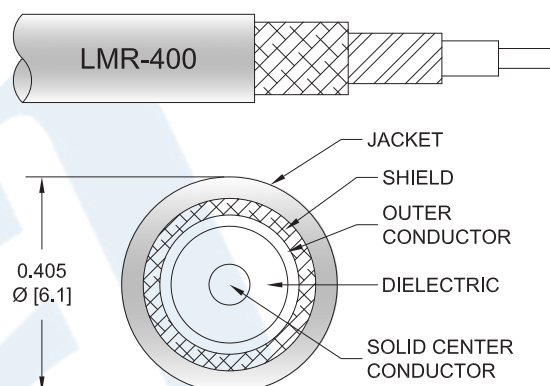

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W02753/HS-50CM reverse polarity TNC male to type N female bulkhead 50 cm cable using LMR-400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack reverse polarity TNC to type N cable assembly has a male to female gender configuration with 50 ohm flexible LMR-400 coax. The PE3W02753/HS-50CM reverse polarity TNC male to type N female cable assembly operates to 2 GHz. Our RF cable assembly with type N bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Male to N Female Bulkhead Cable 50 cm Length Using LMR-400 Coax with HeatShrink PE3W02753/HS-50CM](#)



Reverse Polarity TNC Male to N Female Bulkhead Cable 50 cm Length Using LMR-400 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W02753/HS-50CM

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz
VSWR			1.5:1	
Velocity of Propagation		85		%
RF Shielding	90			dB
Group Delay		1.2 [3.94]		ns/ft [ns/m]
Capacitance		23.9 [78.41]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor Km]		1.39 [4.56]		Ohms/1000ft [Ohms/
DC Resistance Outer Conductor Km]		1.65 [5.41]		Ohms/1000ft [Ohms/
Jacket Spark			8,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	2	GHz
Insertion Loss (Max.)	0.22	0.23	0.24	0.25	0.3	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector Loss

Mechanical Specifications

Cable Assembly

Length*	19.68 in [499.87 mm]
Diameter	0.875 in [22.23 mm]

Cable

Cable Type	LMR-400
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Male to N Female Bulkhead Cable 50 cm Length Using LMR-400 Coax with HeatShrink PE3W02753/HS-50CM](#)



Reverse Polarity TNC Male to N Female Bulkhead Cable 50 cm Length Using LMR-400 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W02753/HS-50CM

Jacket Material	PE, Black
Jacket Diameter	0.405 in [10.29 mm]
One Time Minimum Bend Radius	1 in [25.4 mm]
Repeated Minimum Bend Radius	4 in [101.6 mm]
Bending Moment	0.5 lbs-ft [0.68 N-m]
Flat Plate Crush	40 lbs/in [0.71 Kg/mm]
Tensile Strength	160 lbs [72.57 Kg]

Connectors

Description	Connector 1	Connector 2
Type	TNC Male Reverse Polarity	N Female Bulkhead
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Phosphor Bronze, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel	

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Male to N Female Bulkhead Cable 50 cm Length Using LMR-400 Coax with HeatShrink PE3W02753/HS-50CM](#)



Reverse Polarity TNC Male to N Female Bulkhead Cable
50 cm Length Using LMR-400 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W02753/HS-50CM

How to Order

Part Number Configuration:

PE3W02753/HS

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W02753/HS-12 = 12 inches long cable
PE3W02753/HS-100cm = 100 cm long cable

Reverse Polarity TNC Male to N Female Bulkhead Cable 50 cm Length Using LMR-400 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Reverse Polarity TNC Male to N Female Bulkhead Cable 50 cm Length Using LMR-400 Coax with HeatShrink PE3W02753/HS-50CM](https://www.pasternack.com/tnc-male-n-female-lmr400-cable-assembly-pe3w02753-hs-50cm-p.aspx)

URL: <https://www.pasternack.com/tnc-male-n-female-lmr400-cable-assembly-pe3w02753-hs-50cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W02753/HS-50CM CAD Drawing

Reverse Polarity TNC Male to N Female Bulkhead Cable 50 cm
Length Using LMR-400 Coax with HeatShrink

