



TNC Female Bulkhead to TNC Male Right Angle Cable Using PE-P195 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet


PE3W04559/HS

Configuration

- Connector 1: TNC Female Bulkhead
- Connector 2: TNC Male Right Angle
- Cable Type: PE-P195

Features

- Max Frequency 3 GHz
- 70% Phase Velocity
- Triple Shielded
- FEP Jacket

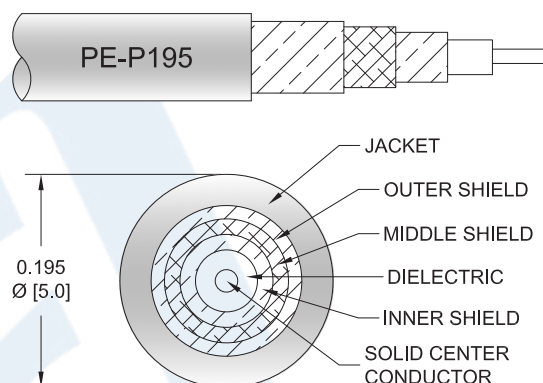

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W04559/HS TNC female bulkhead to TNC male right angle cable using PE-P195 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a female to male gender configuration with 50 ohm flexible PE-P195 coax. The PE3W04559/HS TNC female to TNC male cable assembly operates to 3 GHz. The right angle TNC interface on the PE-P195 cable allows for easier connections in tight spaces. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The triple shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.5:1	
Velocity of Propagation		70		%
Capacitance		29 [95.14]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead to TNC Male Right Angle Cable Using PE-P195 Coax with HeatShrink PE3W04559/HS](#)



TNC Female Bulkhead to TNC Male Right Angle Cable Using PE-P195 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W04559/HS

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	3	GHz
Insertion Loss (Max.)	0.04	0.09	0.13	0.17	0.2	dB/ft
	0.13	0.3	0.43	0.56	0.66	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of connectors. Insertion Loss is estimated as 0.3dB of connector loss

Mechanical Specifications

Cable Assembly

Diameter 0.689 in [17.5 mm]

Cable

Cable Type PE-P195
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 3
 Shield Layer 1 Silver Plated Copper Braid
 Shield Layer 2 Aluminum Tape
 Shield Layer 3 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.195 in [4.95 mm]

Repeated Minimum Bend Radius 1 in [25.4 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead to TNC Male Right Angle Cable Using PE-P195 Coax with HeatShrink PE3W04559/HS](#)



TNC Female Bulkhead to TNC Male Right Angle
Cable Using PE-P195 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W04559/HS

Connectors

Description	Connector 1	Connector 2
Type	TNC Female Bulkhead	TNC Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead to TNC Male Right Angle Cable Using PE-P195 Coax with HeatShrink PE3W04559/HS](#)



TNC Female Bulkhead to TNC Male Right Angle Cable Using PE-P195 Coax with HeatShrink

RF Cable Assemblies Technical Data Sheet

PE3W04559/HS

How to Order

Part Number Configuration:

PE3W04559/HS

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W04559/HS-12 = 12 inches long cable
PE3W04559/HS-100cm = 100 cm long cable

TNC Female Bulkhead to TNC Male Right Angle Cable Using PE-P195 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Female Bulkhead to TNC Male Right Angle Cable Using PE-P195 Coax with HeatShrink PE3W04559/HS](https://www.pasternack.com/tnc-female-tnc-male-pe-p195-cable-assembly-pe3w04559-hs-p.aspx)

URL: <https://www.pasternack.com/tnc-female-tnc-male-pe-p195-cable-assembly-pe3w04559-hs-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W04559/HS CAD Drawing

TNC Female Bulkhead to TNC Male Right Angle Cable

Using PE-P195 Coax with HeatShrink

