

## 1.85mm Male to 1.85mm Female 70GHz Phase & Amplitude Stable Cable Assembly 150CM Length

### PECN3TC0900-150CM

#### Configuration

- Connector 1: 1.85mm Male
- Connector 2: 1.85mm Female
- Coax Flex Type: Flexible

#### Features

- Max Frequency 70 GHz
- Shielding Effectivity > 90 dB
- 74% Phase Velocity
- Double Shielded
- Designed for use as VNA test port extenders
- Highly flexible armored cable construction
- 1.40:1 VSWR to 67 GHz
- Excellent amplitude and phase stability with flexure
- Non-conductive protective Nomex outer sleeve
- Each serialized assembly comes with test data
- In-stock and ready to ship same-day

#### Applications

- General Purpose
- Laboratory Use
- Vector Network analyzer test port extenders
- Semiconductor probe testing
- Precise bench-top testing
- Lab and production testing

#### Description

Pasternack's PECN3TC0900-150CM 1.85mm male to 1.85mm female cable using coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 1.85mm to 1.85mm cable assembly has a male to female gender configuration with 50 ohm flexible coax. The PECN3TC0900-150CM 1.85mm male to 1.85mm female cable assembly operates to 70 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB. Pasternack high performance high flex VNA test cables are designed to provide customers repeatable and accurate VNA measurements. These Test cables have excellent electrical properties including low Insertion Loss, low VSWR and phase stability of +/- 8µ with flexure. The braided stainless steel armoring provides a rugged, but flexible cable with a life exceeding 100,000 flex cycles. The rugged connectors provide up to 5,000 mating cycles when attached with proper care. The flexibility of these cables makes it easier and safer to test your Device Under Test (DUT).? When used with the appropriate calibration kit, these test cables effectively extend the test port of the VNA allowing for accurate measurements of devices that cannot be directly connected to a network analyzer test port.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

| Description     | Minimum | Typical | Maximum | Units |
|-----------------|---------|---------|---------|-------|
| Frequency Range | DC      |         | 70      | GHz   |

## 1.85mm Male to 1.85mm Female 70GHz Phase & Amplitude Stable Cable Assembly 150CM Length

### PECN3TC0900-150CM

#### Electrical Specifications

| Description                      | Minimum | Typical     | Maximum | Units        |
|----------------------------------|---------|-------------|---------|--------------|
| VSWR                             |         |             | 1.4:1   |              |
| Velocity of Propagation          |         | 74          |         | %            |
| RF Shielding                     | 90      |             |         | dB           |
| Group Delay                      |         | 1.37 [4.49] |         | ns/ft [ns/m] |
| Operating Voltage (AC)           |         |             | 170     | Vrms         |
| Input Power (Average)            |         |             | 20      | Watts        |
| Phase Stability with Flexure     |         | 12          |         | Degrees      |
| Amplitude Stability with Flexure |         | 0.15        |         | dB           |

#### Specifications by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 5    | 10   | 20   | 40   | 70   | GHz   |
| Insertion Loss (Max.) | 0.51 | 0.73 | 1.06 | 1.54 | 2.11 | dB/ft |
|                       | 1.67 | 2.4  | 3.48 | 5.05 | 6.92 | dB/m  |
| Power Handling (Max.) |      |      |      |      | 20   | Watts |

Electrical Specification Notes:  
Values at 25°C, sea level.

#### Mechanical Specifications

##### Cable Assembly

Width/Diameter 0 in [0 mm]

##### Cable

Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PTFE  
 Number of Shields 2  
 Jacket Diameter 0.185 in [4.7 mm]  
 One Time Minimum Bend Radius 0.91 in [23.11 mm]  
 Repeated Minimum Bend Radius 1.85 in [46.99 mm]

## 1.85mm Male to 1.85mm Female 70GHz Phase & Amplitude Stable Cable Assembly 150CM Length

### PECN3TC0900-150CM

#### Connectors

| Description                       | Connector 1                | Connector 2                |
|-----------------------------------|----------------------------|----------------------------|
| Type                              | 1.85mm Male                | 1.85mm Female              |
| Impedance                         | 50 Ohms                    | 50 Ohms                    |
| Configuration                     | Straight                   | Straight                   |
| Contact Material and Plating      | Beryllium Copper, Gold     | Beryllium Copper, Gold     |
| Dielectric Type                   | PEEK&PEI                   | PEEK&PEI                   |
| Body Material and Plating         | Passivated Stainless Steel | Passivated Stainless Steel |
| Coupling Nut Material and Plating | Passivated Stainless Steel | Passivated Stainless Steel |
| Torque                            | 8 in-lbs 0.9 Nm            | 8 in-lbs 0.9 Nm            |

#### Environmental Specifications

Operating Range Temperature -40 to +85 deg C

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data


Notes:  
Values at 25°C, sea level.

## 1.85mm Male to 1.85mm Female 70GHz Phase & Amplitude Stable Cable Assembly 150CM Length

### PECN3TC0900-150CM

#### Typical Performance Data

#### How to Order

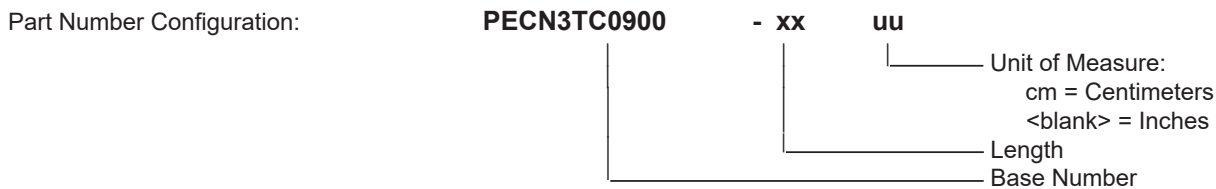

Example:    PECN3TC0900-12 = 12 inches long cable  
              PECN3TC0900-100cm = 100 cm long cable

1.85mm Male to 1.85mm Female 70GHz Phase & Amplitude Stable Cable Assembly 150CM Length from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 1.85mm Female 70GHz Phase & Amplitude Stable Cable Assembly 150CM Length PECN3TC0900-150CM](https://www.pasternack.com/1.85mm-male-1.85mm-female-vna-cable-cable-assembly-pecn3tc0900-150cm-p.aspx)

URL: <https://www.pasternack.com/1.85mm-male-1.85mm-female-vna-cable-cable-assembly-pecn3tc0900-150cm-p.aspx>

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. Pasternack Enterprises reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack Enterprises does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack Enterprises does not assume liability arising out of the use of any part or document.

# PECN3TC0900-150CM CAD Drawing

1.85mm Male to 1.85mm Female 70GHz Phase & Amplitude Stable Cable Assembly 150CM Length

